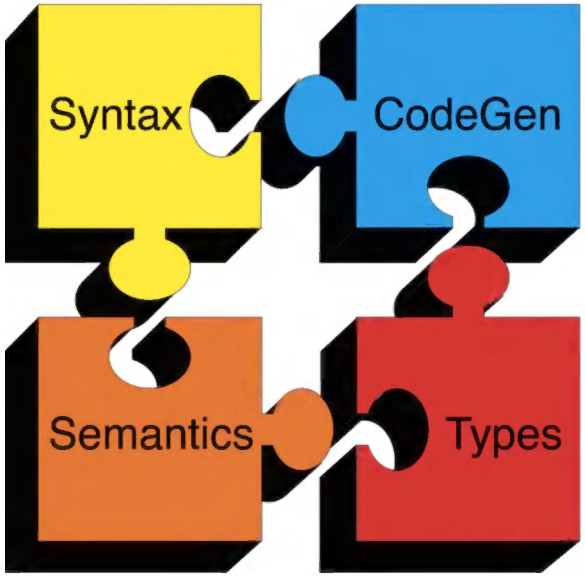

Compilers

Graph Coloring

Graph Coloring

- A coloring of a graph is an assignment of colors to nodes, such that nodes connected by an edge have different colors

- A graph is k-colorable if it has a coloring with k colors

Graph Coloring

- In our problem, colors = registers
  - We need to assign colors (registers) to graph nodes (temporaries)
- Let k = number of machine registers
- If the RIG is k-colorable then there is a register assignment that uses no more than k registers

Graph Coloring

- Consider the example RIG

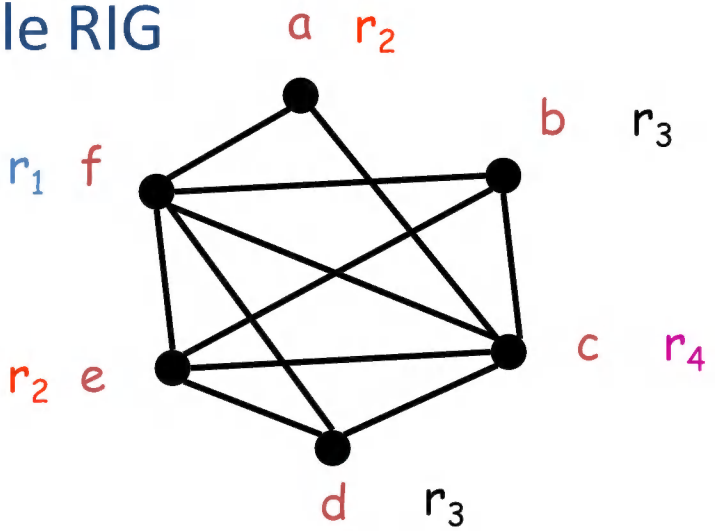

- There is no coloring with less than 4 colors
- There are 4-colorings of this graph

Graph Coloring

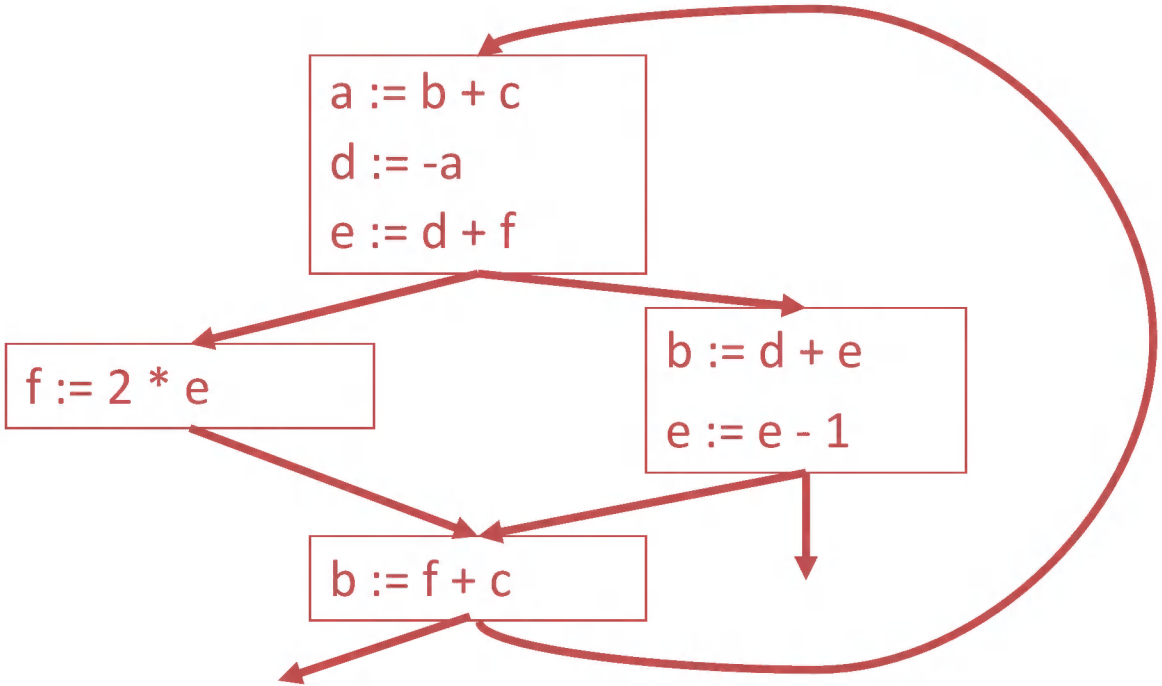

Graph Coloring

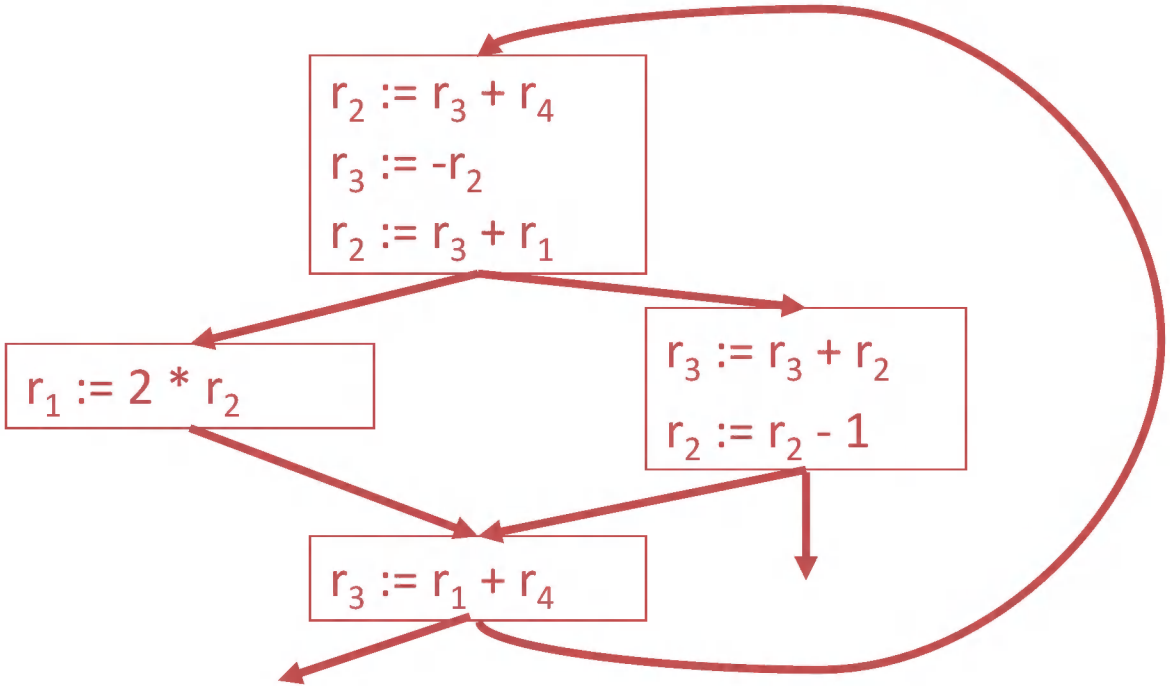

Graph Coloring

Which of the following colorings is a valid minimal coloring of the given RIG?

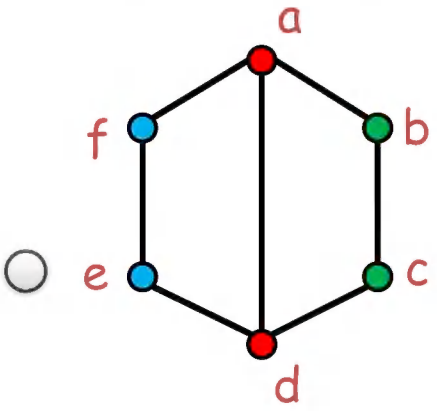

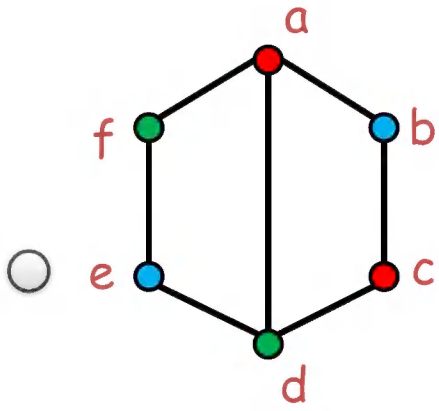

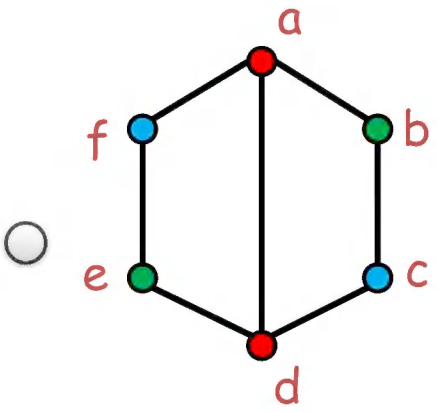

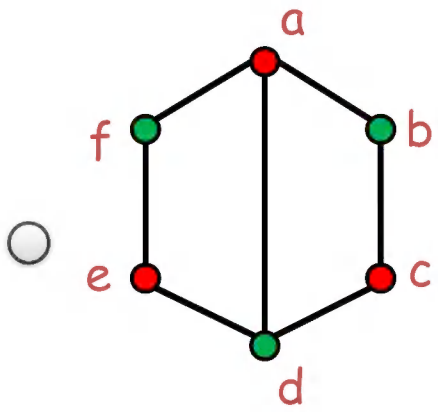

Graph Coloring

- How do we compute graph colorings?

- It isn't easy:
  1. This problem is very hard (NP-hard). No efficient algorithms are known.
     - *Solution: use heuristics*
  2. A coloring might not exist for a given number of registers
     - *Solution: later*

Graph Coloring

- Observation:
  - Pick a node t with fewer than k neighbors in RIG
  - Eliminate t and its edges from RIG
  - If resulting graph is k-colorable, then so is the original graph

- Why?
  - Let $c_1,\ldots,c_n$ be the colors assigned to the neighbors of t in the reduced graph
  - Since n < k we can pick some color for t that is different from those of its neighbors

Graph Coloring

- The following works well in practice:
  - Pick a node t with fewer than k neighbors
  - Put t on a stack and remove it from the RIG
  - Repeat until the graph is empty

- Assign colors to nodes on the stack
  - Start with the last node added
  - At each step pick a color different from those assigned to already colored neighbors

Graph Coloring

- Start with the RIG and with k = 4:

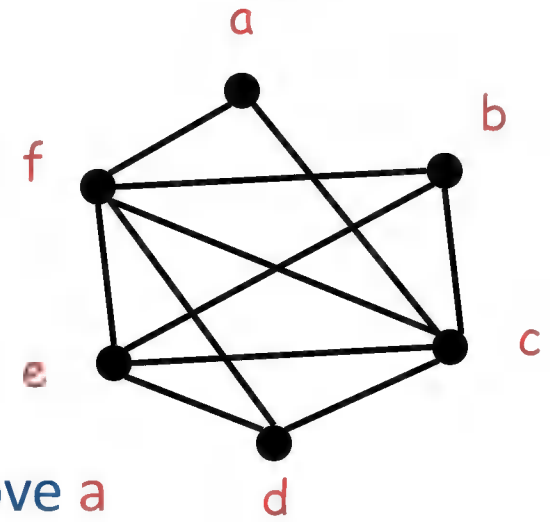

Stack: {}

- Remove a

Graph Coloring

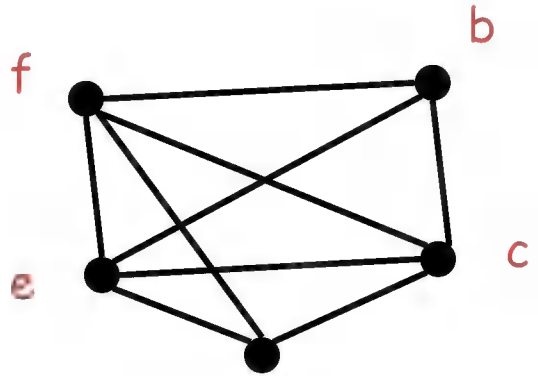

Stack: {a}

- Remove d

- Note: all nodes now have fewer than 4 neighbors

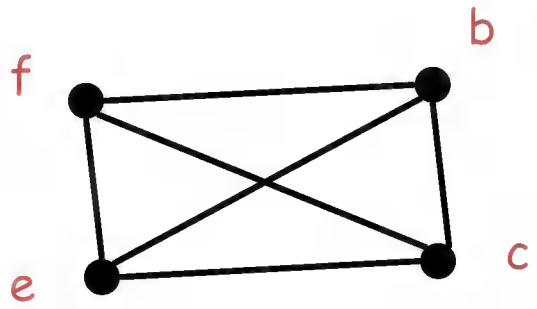

Stack: {d, a}

- Remove c

Graph Coloring

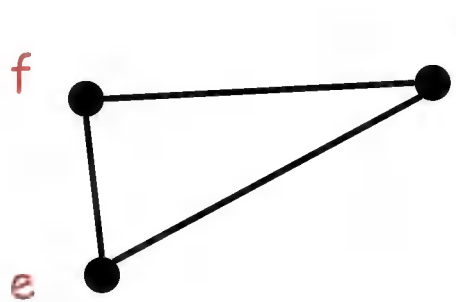

Stack: {c, d, a}

- Remove b

Graph Coloring

Stack: {b, c, d, a}

- Remove e

Graph Coloring

Stack: {e, b, c, d, a}

- Remove f

Graph Coloring

Stack: {f, e, b, c, d, a}

- Empty graph – done with the first part!

Graph Coloring

- Now start assigning colors to nodes, starting with the top of the stack

Stack: {f, e, b, c, d, a}

Graph Coloring

Stack: {e, b, c, d, a}

Graph Coloring



Stack: {b, c, d, a}

- e must be in a different register from f

Graph Coloring

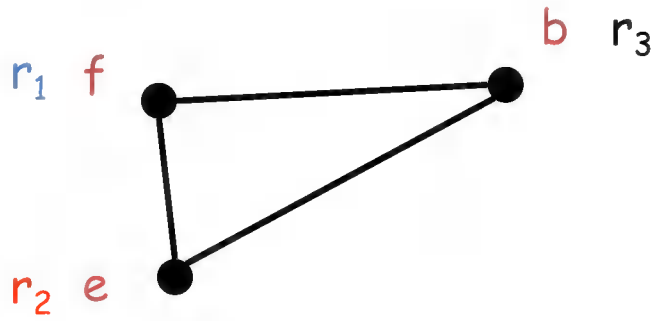

Stack: {c, d, a}

Graph Coloring

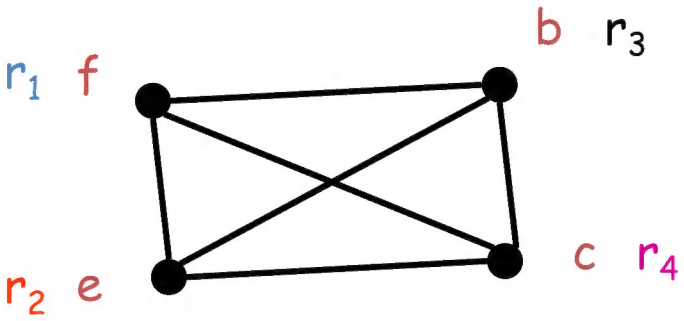

Stack: {d, a}

Graph Coloring

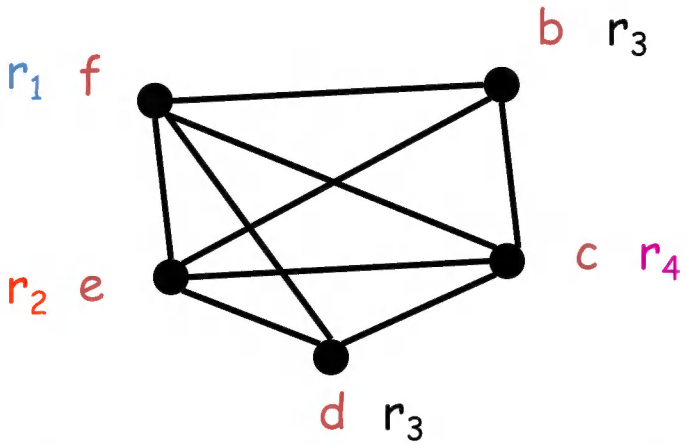

Stack: {a}

- d can be in the same register as b

Graph Coloring

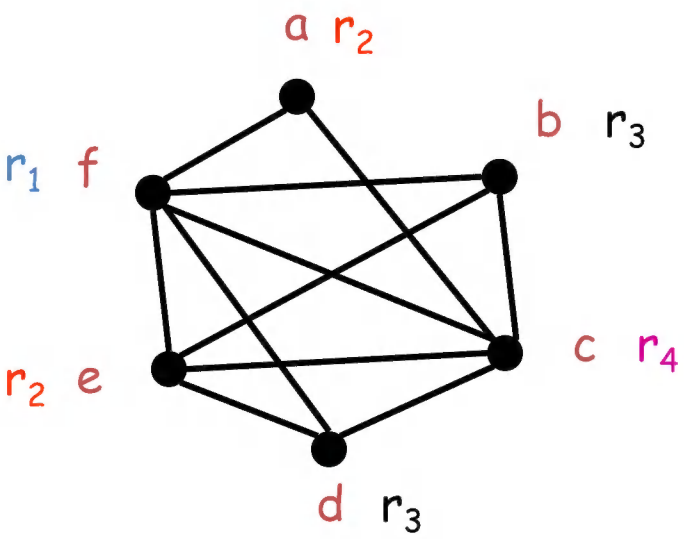

Stack: {}

Graph Coloring

For the given RIG and k = 3, which of the following are valid deletion orders for the nodes of the RIG?

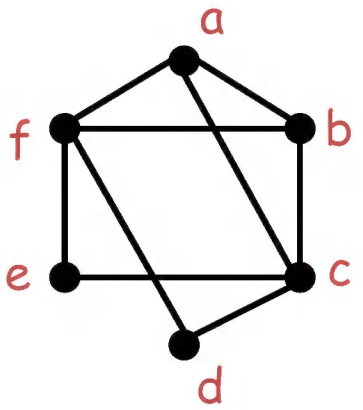

- ○ {d, e, c, b, a, f}
- ○ {e, f, a, b, c, d}
- ○ {d, c, b, a, f , e}
- ○ {d, e, b, c, a, f}